

**Panasonic®****BATTERY SALES GROUP****MATERIAL SAFETY DATA SHEET****SLA VALVE REGULATED LEAD ACID BATTERY SERIES****Section I: Chemical Product and Company Identification****Product Identity:**

VRLA Lead Acid Battery

**Trade Name:**

Panasonic LC and UP-RW Valve Regulated Lead Acid Battery Series

**Distributor:**

Panasonic Industrial Company

Two Panasonic Way/7A-1, Secaucus, New Jersey 07094

**Manufacturer:**

Matsushita Battery Industrial

Osaka, 570, Japan

**For Chemical Emergency****Spill, Leak, Fire, Exposure or Accident****Call CHEMTREC - Day or Night - 24 hours****1-800-424-9300****Outside the USA: 1-703-527-3887 (collect)**

Telephone Number for General Information

Toll Free 1-877-728-2228

Internet: [www.panasonic.com/batteries](http://www.panasonic.com/batteries)**Section II: Hazardous Ingredients / Identity Information**

Component	Common Name	Chemical Name	Approximate % by wt. or vol.	OSHA PEL	ACGIH TLV	CAS#
Lead	(Negative Electrode and Grid)	Pb	48~53 wt%	0.05 mg/m <sup>3</sup>	0.15 mg/m <sup>3</sup>	7439-92-1
Lead Oxide	(Positive Electrode)	PbO <sub>2</sub>	23~26%	0.05 mg/m <sup>3</sup>	0.15 mg/m <sup>3</sup>	1309-60-0
Lead Sulfate	(Positive and Negative Electrode)	PbSO <sub>4</sub>	< 1. wt%	0.05 mg/m <sup>3</sup>	0.15 mg/m <sup>3</sup>	7446-14-2
Sulfuric Acid	(Electrolyte)	H <sub>2</sub> SO <sub>4</sub>	7~10 wt%	1.0 mg/m <sup>3</sup>	1.0 mg/m <sup>3</sup>	7664-93-9

Percentages of components are dependant both on the model of the battery and state of charge/discharge of the battery. Sulfuric Acid is reportable under Sections 302, 311, 312 and 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (EPCRA). Reportable Quantity: 500 lbs for sulfuric acid and 10,000 lbs for lead. See Section XII, Page 3 for more information.

Overall Chemical Reaction:  $\text{PbO}_2 + \text{Pb} + 2\text{H}_2\text{SO}_4 \rightleftharpoons 2\text{PbSO}_4 + 2\text{H}_2\text{O}$

**Note:** Panasonic Valve Regulated Lead Acid batteries are a non-spillable design. Under normal use and handling the customer has no contact with the internal components of the battery or the chemical hazards. Under normal use and handling these batteries do not emit regulated or hazardous substances. **Warning:** Battery terminals/posts and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Wash hands thoroughly after working with batteries and before eating, drinking or smoking.

**Section III: Physical / Chemical Characteristics**

**Boiling Point:** Electrolyte 110°C - 112°C  
**Vapor Pressure:** Electrolyte 11.7 mm Hg. at 20°C  
**Vapor Density (AIR = 1):** Electrolyte 3.4  
**Solubility in Water:** Lead, Lead Oxide and Lead Sulfate are insoluble in water. Sulfuric Acid is 100% soluble in water.

**Appearance and Odor:** The entire battery is a solid article consisting of an opaque plastic case with two protruding lead terminals. The battery is odorless. Sulfuric Acid is a liquid.

**Specific Gravity (H<sub>2</sub>O = 1)** Electrolyte 1.300

**Health Hazard Information (Acute and Chronic) - Sulfuric Acid only.**

The International Agency for Research on Cancer (IARC) has classified "strong inorganic acid mist containing sulfuric acid" as a Category I carcinogen, a substance that is carcinogenic to humans. This classification does not apply to liquid forms of sulfuric acid or sulfuric acid solutions contained within the battery. Inorganic acid mist (sulfuric acid mist) is not generated under normal use of this product. Misuse of the product, such as overcharging, may however result in the generation of sulfuric acid mist.

**Routes of Entry:**

By inhalation (mist), skin and eyes, ingestion.

**Acute:**

Tissue destruction on contact. May cause 2nd and 3rd degree burns or blindness. Ingestion will cause corrosive burns on contact. May be fatal if swallowed.

**Chronic:**

Inhalation of mists may cause upper respiratory irritation.

**Signs and Symptoms:**

Irritation and burning of exposed tissues.

**Medical Conditions:**

Respiratory disorders may be aggravated by prolonged inhalation of mists.



**Panasonic®****BATTERY SALES GROUP****MATERIAL SAFETY DATA SHEET****SLA VALVE REGULATED LEAD ACID BATTERY  
SERIES****Section IV: Emergency and First Aid Procedures****Battery Electrolyte****Inhalation:**

Remove to fresh air. Give oxygen or artificial respiration if needed. Get immediate medical attention.

**Eye Contact:**

Flush with plenty of water for at least 15 minutes. Get immediate medical attention.

**Skin Contact:**

Remove contaminated clothing and flush affected areas with plenty of water for at least 15 minutes.

**Ingestion:**

Do not induce vomiting. Dilute by giving large quantities of water. If available give several glasses of milk. Do not give anything by mouth to an unconscious person. Give CPR if breathing has stopped. Get immediate medical attention.

**Section V: Fire and Explosion Hazard Data****Flash Point:**

Not Applicable

**Flammable Limits:**

Lower 4.10% (Hydrogen gas) Upper 74.20%

**Extinguishing Media:**Dry chemical, foam, halon or CO<sub>2</sub>.**Special Fire Fighting Procedures:**

If batteries are on charge, turn off power. Use positive pressure, self-contained breathing apparatus in fighting fire. Water applied to electrolyte generates heat and causes it to splatter. Wear acid resistant clothing. Ventilate area well.

**Unusual Fire and Explosion Hazards:**

Hydrogen and oxygen gases are generated in cells during normal battery operation or when on charge. (Hydrogen is flammable and oxygen supports combustion). These gases enter the air through the vent caps during battery overcharging. To avoid risk of fire or explosion, keep sparks and other sources of ignition away from the battery. Do not allow metal objects to simultaneously contact both positive and negative terminal of batteries. Ventilate area well.

**Section VI: Reactivity Data****Stability:**

Stable under normal conditions.

**Conditions to Avoid:**

Sparks and other sources of ignition. Prolonged overcharge. Fire or explosion hazard due to possible hydrogen gas generation.

**Incompatibility:**

Combination of sulfuric acid with combustibles and organic materials may cause fire and explosion. Avoid strong reducing agents, most metals, carbides, chlorates, nitrates, peroxide.

**Hazardous Decomposition Products:** Hydrogen gas may be generated in an overcharged condition. In fire or at very high temperatures. CO, CO<sub>2</sub> and sulfur oxides may emit in fire.

Hazardous polymerization will not occur.

**Section VII: Precautions for Safe Handling and Use****Steps to be Taken in Case of Broken Battery Case or Electrolyte Leakage:**

Neutralize any electrolyte or exposed internal battery parts with soda ash (sodium bicarbonate) until fizzing stops. Keep untrained personnel away from electrolyte and broken battery. Place broken battery and clean-up materials in a plastic bag or non-metallic container. Dispose of clean-up materials as a hazardous waste. Ventilate area as hydrogen gas may be given off during neutralization.

**Waste Disposal Method:**

Federal and State laws prohibit the improper disposal of all lead acid batteries. The battery end users (owners) are responsible for their batteries from the date of purchase through their ultimate disposal. The only legally acceptable method of disposal of lead acid batteries is to recycle them at a Resource Conservation and Recovery Act (RCRA) approved secondary lead smelter. The Panasonic SAV-LEAD Recycling Program allows for the recycling of lead-acid batteries in an environmentally sound manner. For more information on the SAV-LEAD Recycling Program call toll-free, 1-800-SAV-LEAD (1-800-728-5323). These batteries are chemically identical to common automotive starter batteries and can be recycled with automotive lead-acid batteries.

**HAZARDOUS WASTE CODES:** D002, D008.**Precautions to be Taken in Handling, Storing and Transportation:**

Store in cool, dry area away from combustible materials. Do not store in sealed, unventilated areas. Avoid overheating and overcharging.

**Other Precautions:**

Do not charge in unventilated areas. Do not use organic solvents or other than recommended chemical cleaners on battery.



# Panasonic®

**BATTERY SALES GROUP****MATERIAL SAFETY DATA SHEET****SLA VALVE REGULATED LEAD ACID BATTERY SERIES****Section VIII: Control Measures / Personal Protection****General:**

Normal room ventilation is sufficient during normal use and handling. Recommend 2 to 3 room air changes per hour to prevent buildup of hydrogen gas.

**Personal Protective Equipment (In the Event of Battery Case Breakage):**

Always wear safety glasses with side shields or full face shield.

Use rubber or neoprene gloves.

Wear acid resistant boots, apron or clothing.

**Work/Hygienic Practices:**

Remove jewelry, rings, watches and any other metallic objects while working on batteries. All tools should be adequately insulated to avoid the possibility of shorting connections. DO NOT lay tools on top of battery. Be sure to discharge static electricity from tools and individual person by touching a grounded surface in the vicinity of the batteries, but away from cells. Batteries are heavy. Serious injury can result from improper lifting or installation. DO NOT lift, carry, install or remove cells by lifting or pulling the terminal posts for safety reasons and because terminal posts and post seals may be damaged. DO NOT wear nylon clothes or overalls as they can create static electricity. DO KEEP a fire extinguisher and emergency communications device in the work area.

**IMPORTANT:**

Wash hands thoroughly after working with batteries and before eating, drinking or smoking.

**Section IX: Regulatory Information****NFPA Hazard Rating for Sulfuric Acid:**

Flammability (Red) = 0

Health (Blue) = 3

Reactivity (Yellow) = 2

**Section X: Transportation Information**

DOT - Unregulated, meets the requirements of 49 CFR 173, 159 (d).

IATA/ICAO - Unregulated, meets the requirements of Special Provision A67.

IMO - Unregulated.

\*For all modes of transportation, each battery and outer package must be labeled: "Non-Spillable" or "Non-Spillable Battery." This label must be visible during transportation. \* Batteries must be securely packed to prevent short-circuiting.

**Section XI: California Proposition 65 Information**

The State of California has determined that certain battery terminals contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. **IMPORTANT: WASH HANDS THOROUGHLY AFTER WORKING WITH BATTERIES AND BEFORE EATING, DRINKING OR SMOKING.**

**Section XII: Other Information - Notice to Readers****General Product Description - LC and UP-RW VRLA Batteries**

Panasonic LC and UP-RW Batteries are valve regulated non-spillable lead-acid batteries with pasted lead-calcium plates. The electrolyte is held captive in an Absorbed Glass Mat (AGM) separator between plates that immobilize the electrolyte in the cell. AGM separator material is a highly porous, absorbent micro fiberglass mat mixed with polymer fibers. There is no "free" electrolyte to leak out if the cell is tipped over (cell case and cover are sealed together) or if the cell is punctured. The AGM separator material immobilizes the electrolyte and creates a situation where the spill of electrolyte is highly unlikely. Typical accidents where a battery case is punctured results in a slight drip or a slow ooze of material out of the cell that cannot be characterized as a spill.

Panasonic LC and UP-RW VRLA batteries are also different from conventional unsealed (wet/flooded) cells because they contain only a minimum amount of electrolyte. VRLA battery electrolyte is a dilute mixture of sulfuric acid in water, which typically has a specific gravity between 1.270 and 1.3. Specific Gravity is a measure of the density of a liquid as compared to that of water, which has a specific gravity of 1.000. Pure sulfuric acid has a specific gravity of 1.835.

**NOTE:** Panasonic LC and UP-RW batteries do not contain a gel electrolyte.



May.11. 2004 11:47AM

516 783 1145

No.9550 P. 6/7

## **Supplemental Information on Panasonic Valve-Regulated Lead Acid Batteries**

### **Transportation**

All Panasonic valve-regulated lead acid batteries are considered "non-spillable" for purposes of transportation by the U.S. Department of Transportation (DOT), International Civil Aviation Organization (ICAO), the International Air Transport Association (IATA) and the International Maritime Dangerous Goods regulations (IMDG). They are considered "non-spillable" by DOT by passing the Vibration Test and Pressure Differential Test as required in 49 CFR 173.159(d). They are also considered to be "non-spillable" by both ICAO and IATA by exceeding the requirements of Special Provisions "A67" as defined in their 1998 Handbooks.

Our batteries are authorized for transportation on deck or under deck storage on either a passenger or cargo vessel by passing the Vibration and Pressure Differential Tests as described in the International Maritime Dangerous Goods Regulations (IMDG).

To transport these batteries as "non-spillable" they must be shipped in a condition that would protect them from short-circuits and be securely packaged so as to withstand conditions normal to transportation. For transportation by a consumer, in or out of a device, they are unregulated thus requiring no additional special handling or packaging.

All of our lead acid batteries and their outside packaging, manufactured after September 30, 1995 are labeled "NON-SPILLABLE" per 49 CFR 173.159(d). If you repackage our batteries either as batteries or as a component of another product you must label the outer package "NON-SPILLABLE" per 49 CFR 173.159(d).

### **Assure Proper Recycling**

Valve-Regulated Lead Acid batteries destined for recycling can be managed under the federal *Universal Waste Rule* codified at 40 CFR Part 273.

In the event of disposal, dispose only in accordance with federal, state and local regulation. Batteries generated as a waste are subject to the Resource Conservation and Recovery Act (RCRA) as a D008 (lead) hazardous waste.

### **Panasonic VRLA Recycling Program**

The Panasonic 1-800-SAV-LEAD Recycling Program for the collection and recycling of valve-regulated lead acid batteries (VRLA) covers all Panasonic Valve-Regulated Lead Acid Batteries. The proper disposal of spent VRLA batteries is becoming more of a critical issue, both from the viewpoint of environmental stewardship and from compliance with federal and state environmental regulations. Panasonic recognizes the burdens and responsibilities that have been placed on our customers to properly dispose of spent VRLA batteries and is proud to offer this voluntary nationwide battery recycling program.

### **Federal and State Requirements for Proper Disposal**

Federal and State laws prohibit the improper disposal of all lead acid batteries. The battery end users (owners) are responsible for their batteries from the date of purchase through their ultimate disposal. The only legally acceptable method of disposal of lead acid batteries is to recycle them at Resource Conservation and Recovery Act (RCRA) approved secondary lead smelter. This Panasonic 1-800-SAV-LEAD Recycling Program will allow for you to arrange for the recycling of your VRLA batteries from anywhere in the United States. The Program will accept Panasonic and other VRLA batteries regardless of manufacturer. Panasonic will handle all VRLA batteries returned in an environmentally sound manner designed to comply with all applicable Federal and State laws and regulations. Panasonic will send batteries only to fully-permitted secondary lead smelters that we believe meet the highest environmental standards. Once the VRLA batteries are received by Panasonic, the cost to transport the batteries to the secondary lead smelter and the actual recycling costs will be borne by Panasonic.

See the next page for How the 1-800-SAV-LEAD Recycling Program Works

May 11, 2004 11:47AM

516 783 1145

No. 9550 P. 7/7

## Supplemental Information on Panasonic Valve-Regulated Lead Acid Batteries (Cont.)

### How the 1-800-SAV-LEAD Recycling Program Works

- 1) We encourage all of our customers to serve as VRLA collection centers for your customers, thereby establishing a reverse distribution network between the end user and the secondary lead recycling facility.
- 2) All shipments to our national consolidation facility must be prepaid. No freight collect shipments will be accepted. All freight collect and non-VRLA batteries will be returned to the shipper.
- 3) Panasonic will maintain on file all necessary documentation for EPA reference. A copy will be provided upon request.
- 4) All batteries must be shipped, prepaid to Ebco Battery Company that serves as our national consolidation facility. (See exception below).

#### SHIPPING ADDRESS:

Ebco Battery Company  
4017 Warm Springs Road  
Columbus, Georgia 31909

- 5) Only VRLA batteries that meet the U.S. Department of Transportation (DOT) "NON-SPILLABLE" (49 CFR 173.159d) requirements will be accepted by this program.
- 6) Panasonic reserves the right to alter or discontinue this program at any time.

### Packaging Requirements

- 1) All VRLA batteries must be fully discharged and packaged in a manner as to insure safe handling and conform to all applicable DOT regulations. (49 CFR 173.159d). A dab of silicon caulking or non-conductive tape on each terminal will ensure that no direct shorts occur during shipment.
- 2) VRLA battery shipments should be made in pallet quantities whenever possible.
- 3) Palletized shipments should be secured with metal bands or poly-wrapped with stack height limited to four (4) feet.
- 4) VRLA batteries shipped on pallets should be of uniform size or be stacked with the larger batteries on the bottom.
- 5) VRLA batteries should be stacked upright in a head-to-base arrangement. Each layer should be separated by cardboard to prevent accidental shorting.
- 6) Smaller quantities of VRLA batteries may be shipped via standard UPS. Be sure that each box does not exceed the UPS weight limit of 70 lbs. A dab of silicon caulking or non-conductive tape on each terminal will ensure that no shorts occur during shipment.
- 7) The outside of every pallet and individual box must be labeled "NON-SPILLABLE" as required by DOT regulations. This label must be visible during transportation.

### Exception:

Full-Truck-Loads – All full-truck-load shipments of VRLA batteries must be scheduled 48 hours in advance. To schedule shipments to our consolidation site, please be sure to fax a scheduling request (including contact name and phone number) to Ebco Battery Company at fax: (706) 569-6774.

### Consumer Users of Panasonic VRLA Batteries

All Panasonic VRLA batteries are chemically identical to common automotive starter batteries and can be returned to any site that accepts automotive lead acid batteries for recycling. Examples include retailers of automotive batteries, automotive service centers, scrap metal dealers, etc...

For additional information on this program or information on how to recycle other Panasonic batteries please call your local Panasonic Battery Sales Group sales office.

### Panasonic Batteries

Panasonic Industrial Company  
A Division of Matsushita Electric Corporation of America  
Two Panasonic Way  
Secaucus, NJ 07094  
Toll Free: 877-726-2228  
Fax: 847-468-5750  
e-mail: [oembatteries@panasonic.com](mailto:oembatteries@panasonic.com)  
Internet: [www.panasonic.com/batteries](http://www.panasonic.com/batteries)

**Panasonic®****BATTERY SALES GROUP****MATERIAL SAFETY DATA SHEET****SLA VALVE REGULATED LEAD ACID BATTERY SERIES****General Product Description - LC and UP-RW VRLA Batteries (continued)**

During normal battery installation, operation and maintenance, the user has NO contact with the internal components of the battery or its internal hazardous chemicals.

Panasonic LC and UP-RW batteries are UL recognized under the file number: Matsushita Electric Industrial Co. Ltd., Matsushita Electric Corp. of America, File #MH13723, 1 Panasonic Way, Secaucus, NJ 07094.

**NOTICE TO READERS: DISCLAIMER**

This information has been compiled from sources considered to be dependable and is, to the best of our knowledge and belief, accurate and reliable as of the date compiled. However, no representation, warranty (either expressed or implied) or guarantee is made to the accuracy, reliability or completeness of the information contained herein. This information relates to the specific material designated and may not be valid for such material used in combination with any other materials or in any process. It is the user's responsibility to satisfy himself as to the suitability and completeness of this information for his own particular use. Matsushita Battery Industrial Co., Ltd., Panasonic Industrial Company and Panasonic Sales Companies do not accept liability for any loss or damage that may occur, whether direct, indirect, incidental or consequential, from the use of this information nor do we offer warranty against patent infringement. Cell and battery product(s) or information contained herein are subject to change without notice. No liability is assumed as a result of their use or application.

Copyright©2002 Matsushita Battery Industrial Co., Ltd. All rights reserved.

Panasonic® is a registered trademark of Matsushita Electric Industrial Co., Ltd.

MSDS Preparation Date: 3/2002 Supersedes: 5/2001


Preparer: Charles R. Monahan Director, Regulatory Compliance 201-392-8484

Printed in the U.S.A.



# VALVE-REGULATED LEAD ACID BATTERIES: INDIVIDUAL DATA SHEET

## LC-X1220P/LC-X1220AP

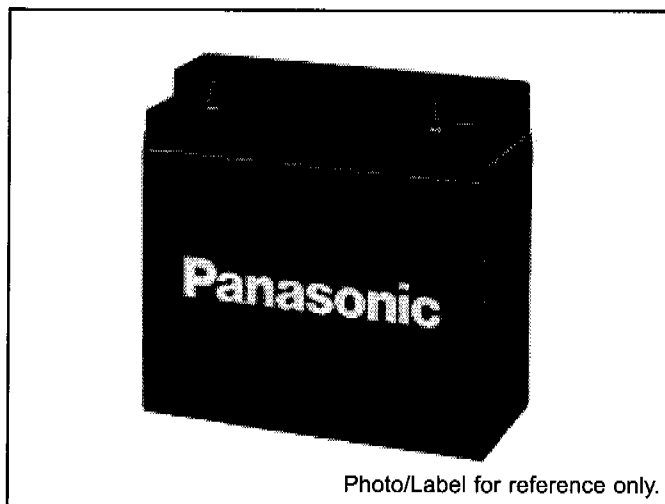

Photo/Label for reference only.

(a) The photo and dimensions represent LC-X1220P.

### Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		20Ah
Dimensions	Length	7.126 inches (181.0 mm)
	Width	2.992 inches (76.0 mm)
	Height	6.575 inches (167.0 mm)
	Total Height	6.575 inches (167.0 mm)
Approx. mass		14.56 lbs. (6.6 kg)
Standard Terminals and Resin	UL94HB M5 Bolt and Nut	LC-X1220P
Optional Terminals and Resin	UL94HB M5 Threaded Post	LC-X1220AP

◆ Please contact Panasonic for availability on optional items. Optional items may be subject to minimum order quantities.

### Characteristics

Capacity (note) 77°F (25°C)		20 hour rate (1.2A)	20Ah
		10 hour rate (2.2A)	18Ah
		5 hour rate (3.8A)	16Ah
		1 hour rate (14A)	12Ah
		1.5 hour rate discharge Cut-off voltage 10.5 V	9.8A
Internal Resistance		Fully charged battery 77°F (25°C)	Approx. 11mΩ
Temperature dependency of capacity (20 hour rate)		104°F (40°C)	102%
		77°F (25°C)	100%
		32°F (0°C)	85%
		5°F (-15°C)	65%
Self discharge 77°F (25°C)		Residual capacity after standing 3 months	91%
		Residual capacity after standing 6 months	82%
		Residual capacity after standing 12 months	64%
Charge Method (Constant Voltage)	Cycle use (Repeating use)	Initial current	8 A or smaller
		Control voltage	14.5 V to 14.9 V (per 12V cell 25°C)
	Trickle use	Initial current	3 A or smaller
		Control voltage	13.6V to 13.8V (per 12V cell 25°C)


(Note) The above characteristics data are average values obtained within three charge/discharge. Cycles not the minimum values.

(Note) For cycle use of the battery, please contact us in advance.

For main and standby power supplies. Expected trickle life: Approx. 6 years at 25°C, Approx. 10 years at 20°C.


### Dimensions (mm)

Terminal type: LC-X1220P: M5 bolt and nut  
LC-X1220AP: M5 threaded post

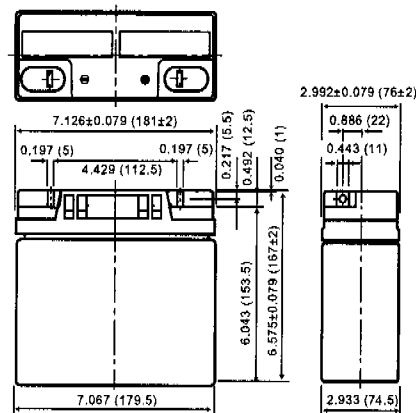


Battery case resin: Standard (UL94HB) Color is black.

### Discharge characteristics 77°F (25°C) (Note)

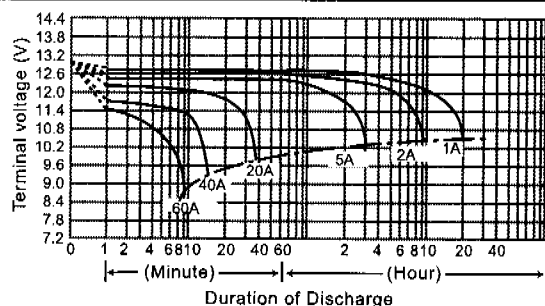

### Duration of discharge vs. Discharge current (Note)

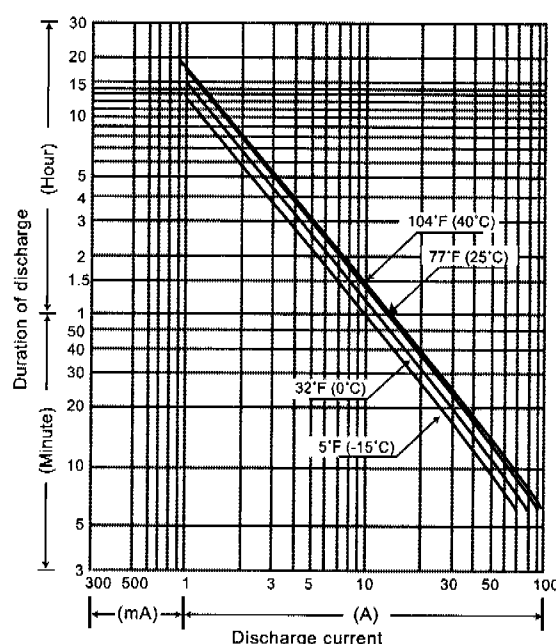

**Panasonic**

**VRLA BATTERIES**

**AUGUST 2003**

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Panasonic for the latest information.